

E-Z RECT BOLTLESS TRIMLINE SHELVING


Excellent for bin boxes, small parts and bulk storage. Ideal for short or wide span shelving applications. In addition, this versatile shelving can be used for high-rise or multi-level shelving systems.

LOAD CAPACITIES	MAXIMUM EVENLY DISTRIBUTED STATIC LOAD PER PAIR OF CONNECTORS					
	36" 914 mm	39 1/2" 1,003 mm	48" 1,219 mm	60" 1,524 mm	66" 1,676 mm	72" 1,829 mm
4 Shelf Clips & One Metal 20 ga. Shelf	350 lb 159 kg	290 lb 132 kg	200 lb 91 kg	- -	- -	- -
TFCV	390 lb 177 kg	350 lb 159 kg	290 lb 132 kg	- -	- -	- -
TBC	600 lb 272 kg	550 lb 249 kg	500 lb 227 kf	- -	- -	- -
TWC	- -	- -	- -	570 lb 259 kg	470 lb 213 kg	395 lb 179 kg
TWB with one Combination Tie Bar	- -	- -	- -	1,200 lb 544 kg	1,000 lb 454 kg	800 lb 363 kg




Call for Complete Brochure

COMPONENTS AND ACCESSORIES

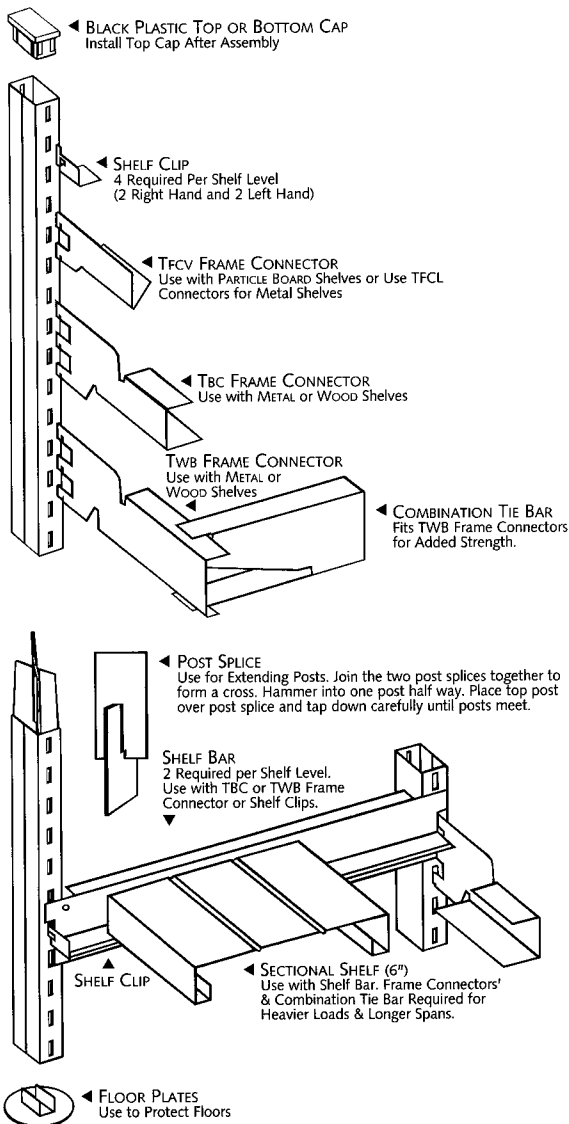

ONLY FOUR BASIC COMPONENTS

- 1) Post
- 2) Post Connector
- 3) Frame Connector (Beam)
- 4) Shelf

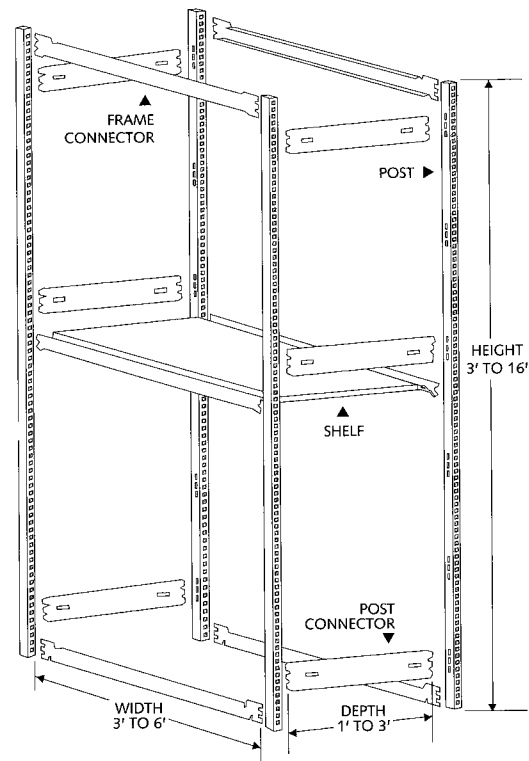

- SAFE WORKING LOADS UP TO 7000 LBS (3,175KGS) PER PAIR OF POST OR BAY OF SHELVING.
- SAFETY FACTOR OF 1.66 TO 1 BASED ON UNIFORM STATIC LOADING ONLY.
- PLEASE CONTACT THE FACTORY FOR CAPACITIES NOT SHOWN IN CHART.